


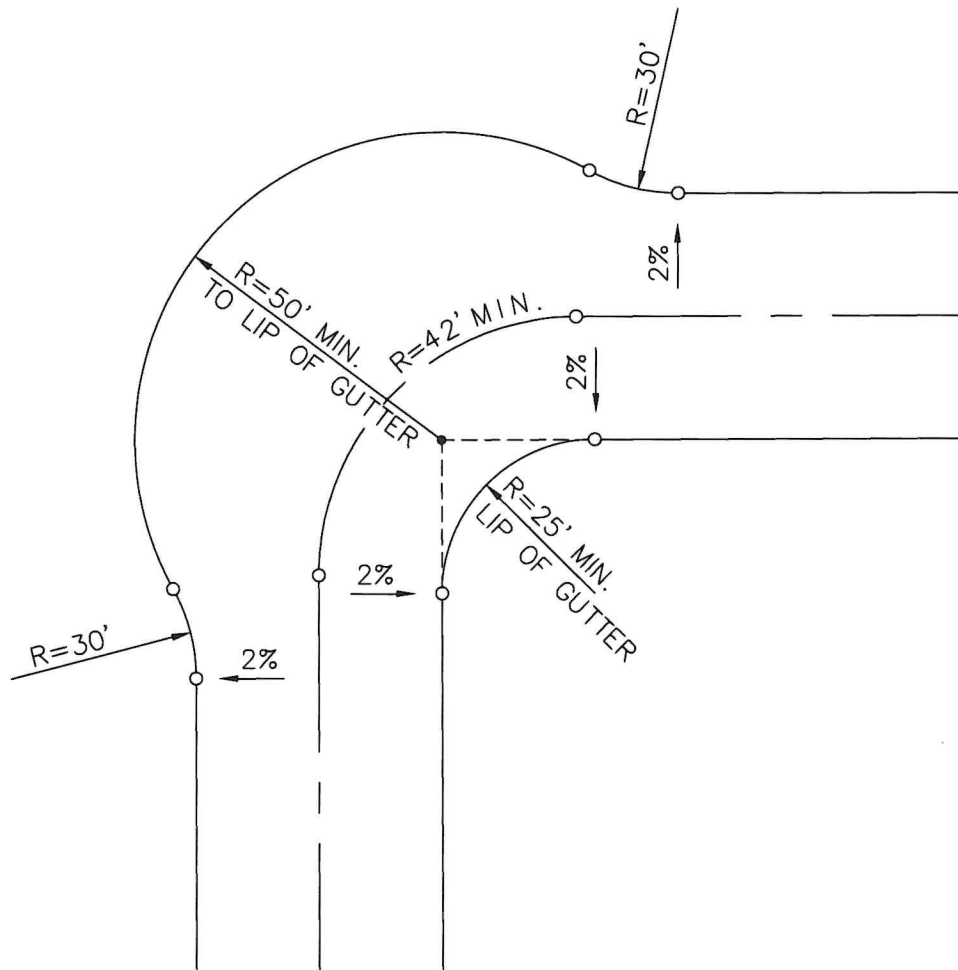

NOTES:

1. INTERSECTION KNUCKLES ARE NOT REQUIRED WHERE THE CENTERLINE RADIUS EXCEEDS 100'.
2. INTERSECTION ANGLE SHALL BE BETWEEN 80° TO 110°.
3. MINIMUM GUTTER SLOPE THROUGH KNUCKLE IS 0.5%.
4. A WATER FLOW TEST SHALL BE PERFORMED IN THE COMPLETED CURB AND GUTTER SYSTEM TO VERIFY POSITIVE DRAINAGE AND PROPER FLOW PER PUBLIC WORKS.

YUBA COUNTY
DEPARTMENT OF PUBLIC WORKS

URBAN RESIDENTIAL
KNUCKLE

APPROVED BY:

DATE:

108