
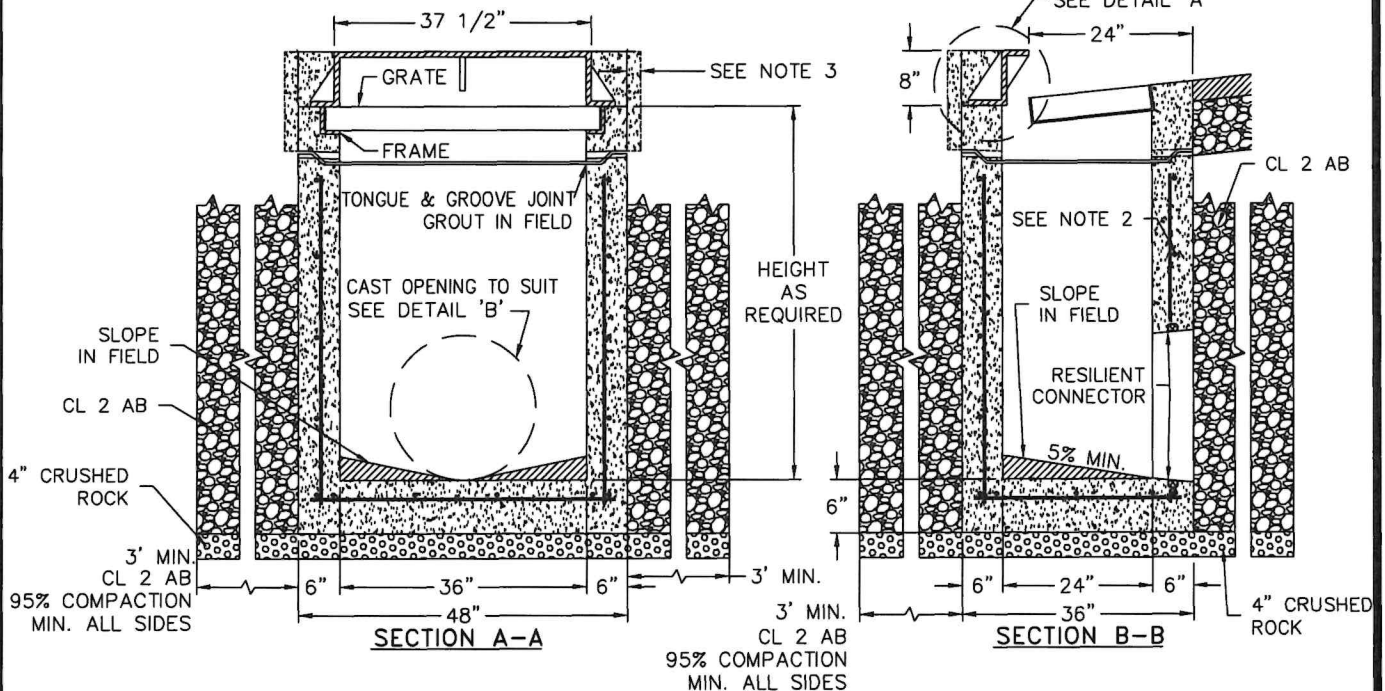
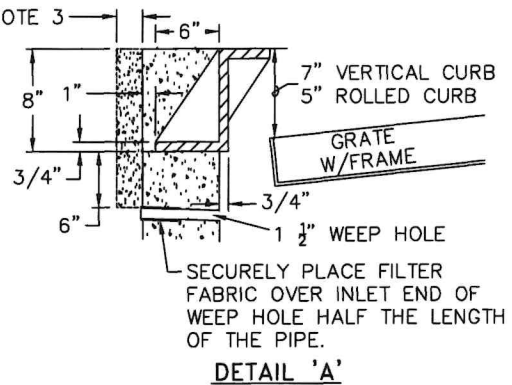


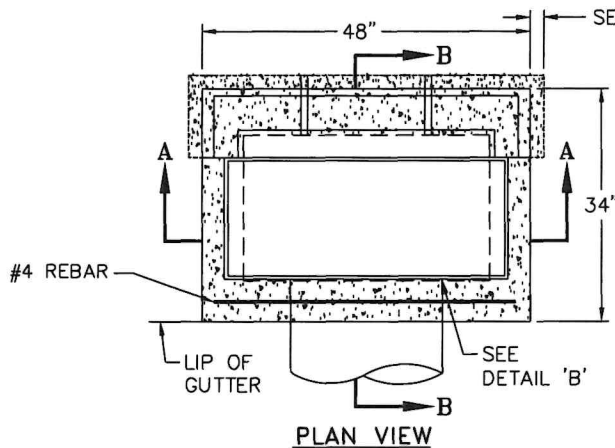

NOTES

1. INLET CAN BE PRECAST MANUFACTURED CONCRETE UNIT OR CAST IN PLACE DESIGNED FOR H-20 LOADING. CAST-IN-PLACE TO BE 6 SACK CONCRETE WITH 4,000 PSI MIN.
2. REINFORCING SHALL BE #4 BARS @ 12" O.C. (MAX.) EACH WAY OR 4"x4"-6-6 GAUGE W.W.F. IN THE WALL AND BASE.
3. ADD 8" CONCRETE COLLAR FOR DETACHED SIDEWALK.
4. PLACE CAST IRON HOOD, FRAME AND GRATE. D&L FOUNDRY MODEL FA-8543, I-3541-01, BLACK DIP OR EQUAL.
5. STAMP DRAIN INLETS "NO DUMPING DRAINS TO RIVER".
6. SUBGRADE TO BE APPROVED BY ENGINEER OR GEOTECH PRIOR TO PLACEMENT OF CRUSHED ROCKS.

YUBA COUNTY
DEPARTMENT OF PUBLIC WORKS

DRAIN INLET

APPROVED BY:

DATE:

402