



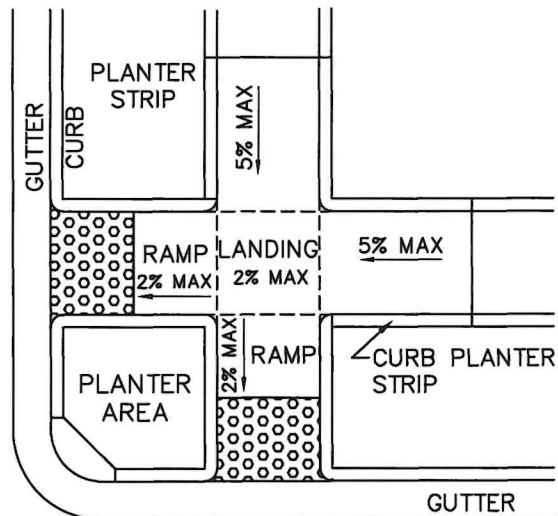

PLANTER STRIP CURB RAMPS
N.T.S

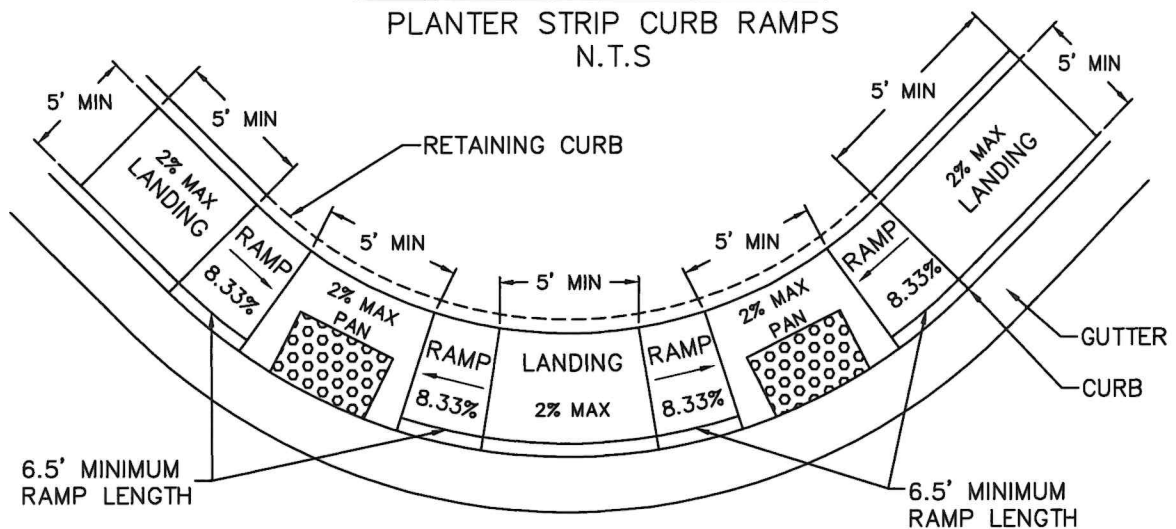

DUAL PAN CURB RAMPS
N.T.S

NOTES:

1. ALL CURB RAMPS SHALL CONFORM TO CURRENT ADA STANDARDS.
2. ALL PATHS SHALL HAVE A MINIMUM WIDTH OF 5'. LANDINGS SHALL BE A MINIMUM OF 5' IN LENGTH.
3. RAMPS SHALL HAVE A MAXIMUM SLOPE OF 8.33% AND A MINIMUM LENGTH OF 6 1/2 FEET.
4. LANDING AND PANS SHALL HAVE A SLOPE OF NO MORE THAN 2% IN ANY DIRECTION.
5. ALL DETECTABLE WARNING SURFACES SHALL BE WET-SET.
6. PLANTER STRIP RAMPS SHALL HAVE A MAXIMUM SLOPE OF 2% IN ALL DIRECTIONS ON LANDINGS RAMPS, AND SIDEWALKS. SIDEWALKS APPROACHING LANDINGS SHALL HAVE A MAXIMUM SLOPE OF 5% IN THE DIRECTION OF TRAVEL AND A MAXIMUM CROSS SLOPE OF 2%.
7. DOWEL ALL OF ADA RAMP TO CURB

YUBA COUNTY
DEPARTMENT OF PUBLIC WORKS

DUAL CURB RAMPS

APPROVED BY: 

DATE: 8/12/26

203A