


RURAL MINOR COLLECTOR ROAD

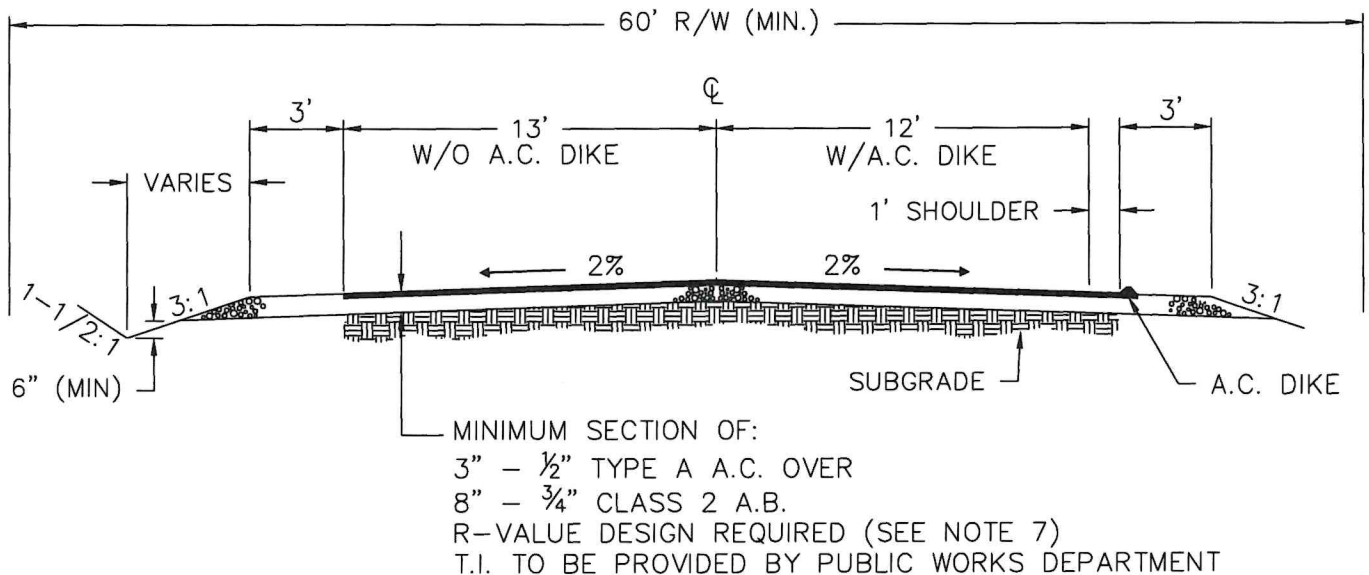

NOTES:

1. REFER TO SECTION 6 OF YUBA COUNTY STANDARD SPECIFICATIONS FOR ADDITIONAL REQUIREMENTS.
2. SEE ROCK LINED DITCH DETAIL FOR REQUIREMENTS.
3. DESIGN SPEED IS 50 M.P.H. OR AS APPROVED BY PUBLIC WORKS.
4. LOCATIONS OF AC DIKE SHALL BE DETERMINED BY THE ENGINEER AND APPROVED BY PUBLIC WORKS.
5. TOP 12" OF SUBGRADE, A.B. LAYER AND A.C. LAYER SHALL BE COMPACTED TO 95% RELATIVE COMPACTION.
6. PROVIDE LEFT TURN LANES AS DETERMINED BY PUBLIC WORKS.
7. SOIL STABILIZATION TREATMENT IS REQUIRED ON ALL SUBGRADE WHEN R-VALUE IS 20 OR LESS AND/OR AS RECOMMENDED BY THE GEOTECHNICAL ENGINEER AND AS DIRECTED BY PUBLIC WORKS.

YUBA COUNTY
DEPARTMENT OF PUBLIC WORKS

RURAL MINOR
COLLECTOR ROAD

APPROVED BY:

DATE:

8/12/20 122