



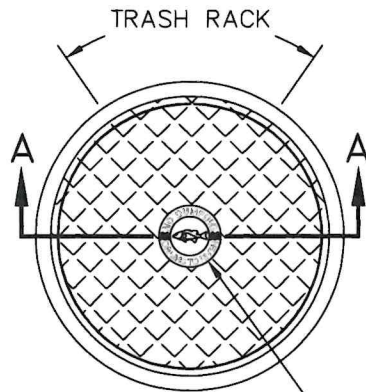

FIELD INLET

MOUNT MARKER TO CENTER OF LID
PER MANUFACTURER'S SPECIFICATIONS

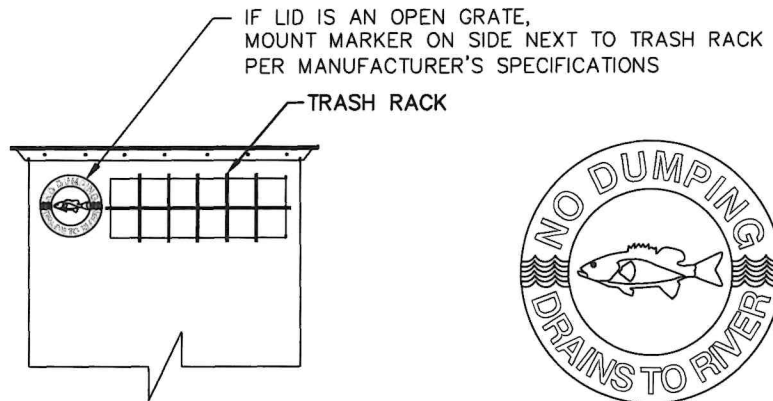

SECTION A-A




STORM DRAIN MARKER

NO DUMPING!
FLOWS TO RIVER


STAMP MESSAGE & SYMBOL

NOTES

1. MESSAGE AND SYMBOL STAMP SHALL BE AS SHOWN OR AS APPROVED BY THE DEPARTMENT OF PUBLIC WORKS.
2. LETTERS SHALL BE 1.5 INCHES (38MM) IN HEIGHT. THE MESSAGE SHALL BE CENTERED ON THE BACK OF THE INLET, DIMENSION OF STORM DRAIN SHALL NOT EXCEED 12"X33". USE 8" STAMP ON INLETS WITH DETACHED WALK TO STAMP ON CURB.
3. CONCRETE SHALL BE STAMPED IN SUCH A WAY AS TO PROVIDE FOR A CLEAR AND LEGIBLE IMAGE. DETACHED WALK BEHIND INLET.
4. FOR DROP INLETS AND CATCH BASINS WITH PRECAST TOPS, STEEL STORM DRAIN MARKERS MAY REPLACE THE CONCRETE STAMP. THE MARKER SHALL BE EMOSSSED STAINLESS STEEL AND INSTALLED WITH A RIVET FASTENER AND ADHESIVE.
5. STORM DRAIN INLET MARKERS SHALL BE THE 4" DIAMETER DURACAST CURB MARKER WITH A POLYURETHANE DOME, MANUFACTURED BY DAS MANUFACTURING, INC., PART NUMBER "SDR" OR APPROVED EQUAL.
6. THESE MARKERS INCLUDE A GRAPHIC OF A FISH WITH THE STATEMENT, "NO DUMPING DRAINS TO RIVER".
7. DESIGNATED MARKERS SHALL BE INSTALLED ACCORDING TO THE MANUFACTURER'S SPECIFICATIONS ON THE TOP OF THE CURB, OR AT AN APPROPRIATE ALTERNATE NEARBY LOCATION WHEN NO CURB IS AVAILABLE, AT ALL STORM DRAIN INLETS.

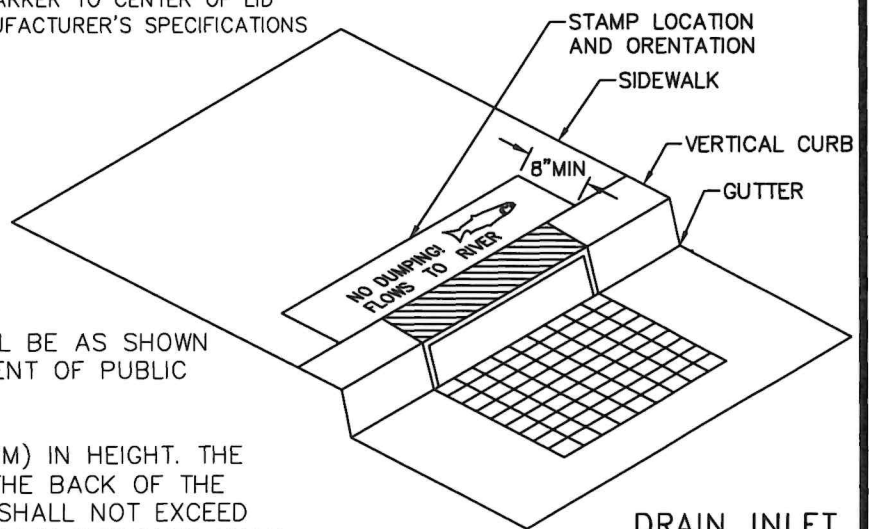

DRAIN INLET

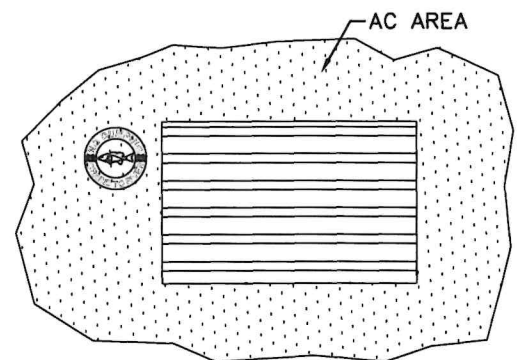

DROP INLET

YUBA COUNTY
DEPARTMENT OF PUBLIC WORKS

**STORM DRAIN INLET
STAMP & MARKING**

APPROVED BY: *[Signature]*

DATE: 8/12/26

411